

# InLet MRL Rise Elevator

## Traction Machineroomless Datasheet

The InLet MRL Rise elevator is a traction machine-roomless elevator designed for installation in a concrete shaft in existing storey buildings where an elevator solution is needed. The InLet MRL Rise elevator is a high-speed elevator that is ideal for high-rise buildings with many lifting meters.

The cabin is a closed elevator seat, is operated by pulse pressure and it can operate up to 90 meters lifting height corresponding to about 32 stops. The elevator has the passenger's safety and comfort as the first priority, with an aesthetic design and muted sound in the cabin.



### INSTALLATION EXAMPLE



### WE GUARANTEE

- ✓ **HIGH QUALITY THAT PAYS OFF IN THE LONG RUN**  
We have the quality, it has been proven with many years in the market as well as the lifespan of our products which makes it good business to invest in quality.
- ✓ **CUSTOMIZED SOLUTIONS**  
We customize solutions to consultant's, contractor's or client's wishes to achieve the greatest satisfaction with the final product.
- ✓ **CLOSE CONTACT & COMPETENT SUPPORT**  
We maintain close contact with the customer throughout the process, so that you get the right solution installed in the best way.
- ✓ **A TRUSTWORTHY PARTNER WITH EXPERIENCE**  
We are the only Danish manufacturer of lifts and we believe that is because we have always delivered value for the investment.
- ✓ **SOLUTIONS THAT WITHSTAND THE TEST OF TIME**  
Our lifts last for the Nordic climate so avoid problems, our products - they last for a long time.

# InLet MRL Rise Elevator

Traction Machineroomless  
Datasheet

## TEKNISKE SPECIFIKATIONER

**Max. lifting height:**  
32 stops or 90 meters

**Max. load:**  
630 - 2000 kg ( 8 - 26 persons)

**Max. speed:**  
1,6 - 2,00 m/s

**Min. Top height**  
3600 mm

**Pit depth:**  
1350 mm

**Placement:**  
Indoors in a concrete shaft


**Approval type:**  
EN 81-20, EN 81-21, EN 81-70 & EN 81-28

**Alarm:**  
2-way monitored elevator alarm  
(PSTN phone line or SIM card)

**Safety inspection:**  
Min. 4 times a year (statutory)  
(May vary according to notice.)

### CONTROL CABINET SIZES

There should be space for a control cabinet next to the top elevator exit. The cabinet is available in 3 sizes:

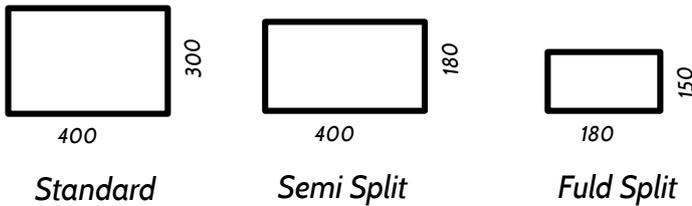

### OPERATION



Direction arrows




Elevator call

### CABIN & SHAFT SIZES

Amount of people	Max load in kg	Cabin Measurements			Shaft Measurements		
		Cabin Width	Cabin Depth	Door Opening	Shaft Width	Shaft Depth(90°)	Shaft Depth (180°)
8	630	1100	1400	900	1710	1800	1990
10	750	1300	1400	900	2030	1800	1990
13	1000	1400	1700	1000	2130	2100	2290
17	1275	1400	2100	1100	2200	2500	2690
21	1600	1450	2400	1100	2250	2800	2990
26	2000	1600	2500	1200	2400	2900	3090

### ONE SIDED ENTRANCE

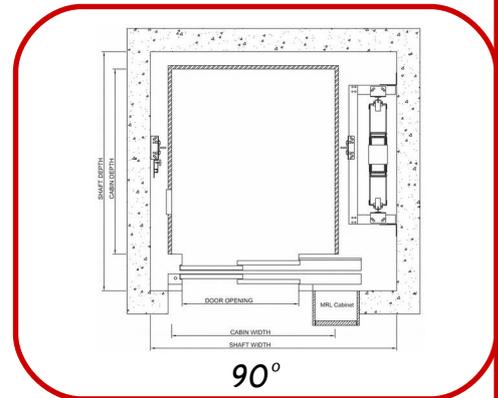

### DOUBLE SIDED ENTRANCE

