

TrinLet TL250

Stairlift Datasheet

TrinLet TL250 is a robust and Stable wheelchair lift for small stairways, which give the user a natural secure feeling when being transported up and down between levels. TrinLet TL250 has a lifting capacity of 250 kg.



TrinLet TL250 is designed to be installed directly on the floor and does not require a pit, furthermore it is easy to un- and reinstall at another location.



The lift is suitable to be installed indoors as well as outdoors.

The lift is operated with a continual pressure hold. The lift is constructed in aluminium, and is a low weight solution at only 51 kg in total. The lift is as a standard delivered unpainted, but can be customized in a number of colors at an extra fee.

DIMENSIONS

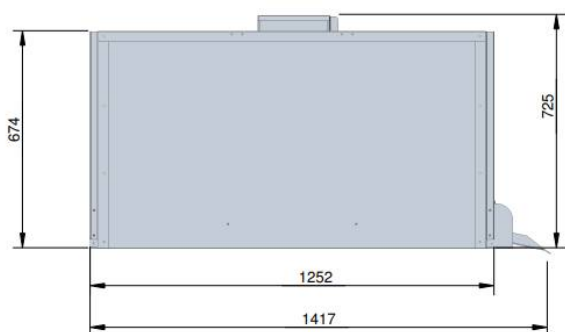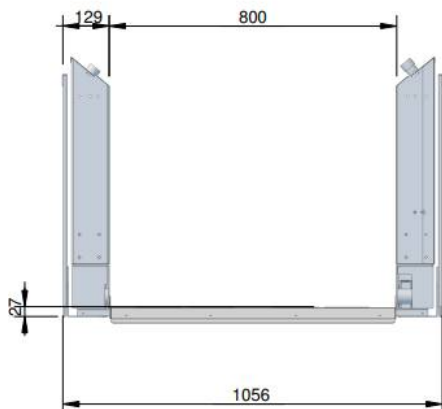

WE GUARANTEE

- ✓ **HIGH QUALITY THAT PAYS OFF IN THE LONG RUN**
We have the quality, it has been proven with many years in the market as well as the lifespan of our products which makes it good business to invest in Quality.
- ✓ **CUSTOMIZED SOLUTIONS**
We customize solutions to consultant's, contractor's or client's wishes to achieve the greatest satisfaction with the final product.
- ✓ **CLOSE CONTACT & COMPETENT SUPPORT**
We maintain close contact with the customer throughout the process, so that you get the right solution installed in the best way.
- ✓ **A TRUSTWORTHY PARTNER WITH EXPERIENCE**
We are the only Danish manufacturer of lifts and we believe that is because we have always delivered value for the investment.
- ✓ **SOLUTIONS THAT WITHSTAND THE TEST OF TIME**
Our lifts last for the Nordic climate so avoid problems, our products - they last for a long time.

TrinLet TL250

Stairlift
Datasheet

TECHNICAL SPECIFICATIONS

Max lifting capacity:
250 kg

Platforms inner measurements:
1056 x 800 (mm)

Platforms outer measurements:
1429 x 1050 (mm)

Placement:
In- or out doors

Stair height:
30 - 500 mm

Speed:
25 mm/sek

Electrical requirements:
220 / 240V~50 / 60 Hz-10 En enkelt
fase 10A

Noise level:
52 dB(A)

Installation options:
Directly on flat surface or floor

Platform arrestor mechanisms:
Fully automatic

Platform operation:
Constant pressure hold

Floor operation:
Constant pressure hold

Legislation:
Maskindirektivet. 2006/42/EF, CE-Mærket

Approval type:
AT bekendtgørelse 461/2016

FOR IN- AND OUT DOOR INSTALLATION

